


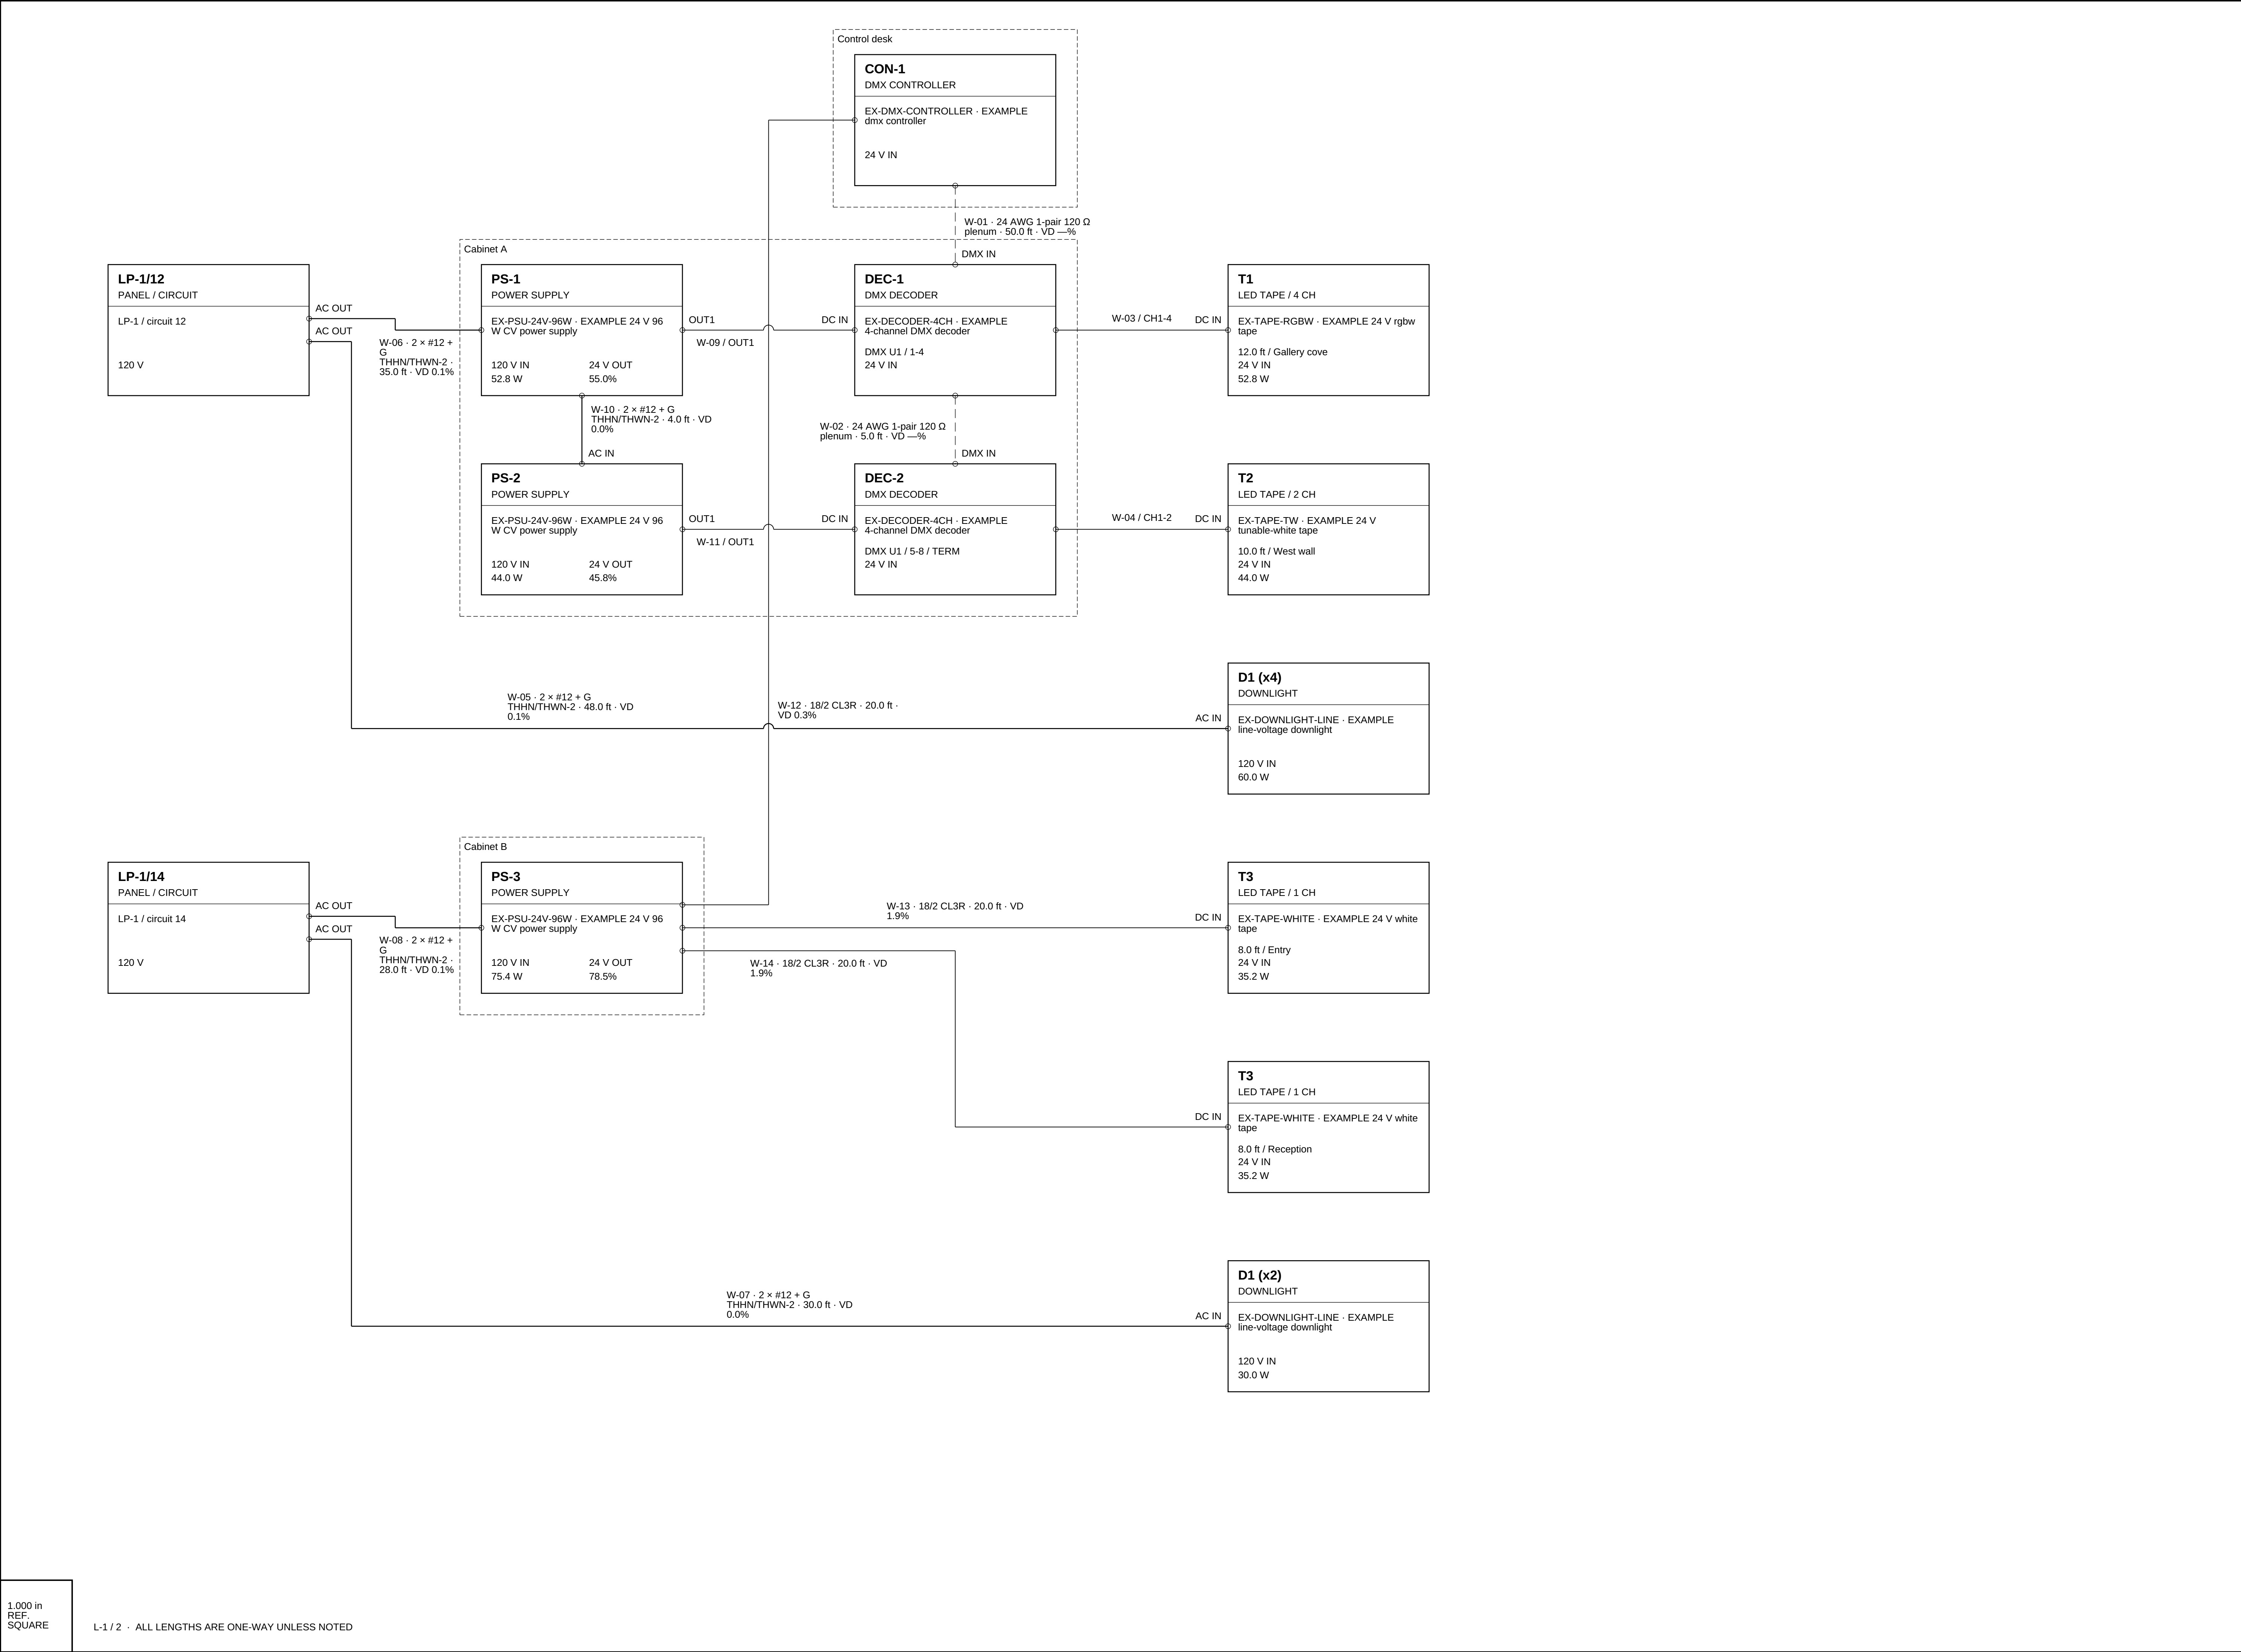

1,000 in
REF.
SQUARE

L-1 / 2 · ALL LENGTHS ARE ONE-WAY UNLESS NOTED

PROJECT EXAMPLE · Gallery lighting riser
PROJECT NUMBER EX-001
CLIENT Example design review
SITE ADDRESS
SHEET TITLE LIGHTING SYSTEM RISER
SHEET L-1
DATE 2026-09-24
SCALE NOT TO SCALE
DRAWN BY EXAMPLE
CHECKED BY
LATEST REVISION —
ISSUE STATUS NOT FOR CONSTRUCTION

EQUIPMENT SCHEDULE

TAG	QTY	SKU / MODEL	LOCATION / ENCLOSURE	POWER / CONTROL
PS-1	1	EX-PSU-24V-96W EXAMPLE 24 V 96 W CV power supply	Cabinet A Cabinet A	LP-1/12 —
PS-2	1	EX-PSU-24V-96W EXAMPLE 24 V 96 W CV power supply	Cabinet A Cabinet A	LP-1/12
PS-3	1	EX-PSU-24V-96W EXAMPLE 24 V 96 W CV power supply	Cabinet B Cabinet B	LP-1/14 —
DEC-1	1	EX-DECODER-4CH EXAMPLE 4-channel DMX decoder	Cabinet A Cabinet A	PS-1 OUT1 CON-1 DATA-OUT
DEC-2	1	EX-DECODER-4CH EXAMPLE 4-channel DMX decoder	Cabinet A Cabinet A	PS-2 OUT1 DEC-1
CON-1	1	EX-DMX-CONTROLLER EXAMPLE dmx controller	Control desk Control desk	PS-3 OUT1 —

LOAD SCHEDULE

TAG	SKU / MODEL	QTY / LENGTH	WATTS	FEED / ZONE
T1	EX-TAPE-RGBW EXAMPLE 24 V rgbw tape	12.0 ft	52.8	DEC-1 CH1-4 Gallery cove
T2	EX-TAPE-TW EXAMPLE 24 V tunable-white tape	10.0 ft	44.0	DEC-2 CH1-2 West wall
T3	EX-TAPE-WHITE EXAMPLE 24 V white tape	8.0 ft	35.2	PS-3 OUT1 Entry
T3	EX-TAPE-WHITE EXAMPLE 24 V white tape	8.0 ft	35.2	PS-3 OUT1 Reception
D1	EX-DOWNLIGHT-LINE EXAMPLE line-voltage downlight	4 ea	60.0	LP-1/12 Gallery
D1	EX-DOWNLIGHT-LINE EXAMPLE line-voltage downlight	2 ea	30.0	LP-1/14 Entry

WIRE SCHEDULE

TAG	WIRE / FROM → TO	LENGTH FT	A	VD %	END V	SETS
W-01	24 AWG 1-pair 120 Ω plenum CON-1:DATA-OUT → DEC-1	50.0	0.00	—	—	1
W-02	24 AWG 1-pair 120 Ω plenum DEC-1 → DEC-2	5.0	0.00	—	—	1
W-03	18/5 CL3R DEC-1:CH1-4 → T1	20.0	2.20	1.82	23.56	1
W-04	18/3 CL3R DEC-2:CH1-2 → T2	20.0	1.83	2.43	23.42	1
W-05	2 × #12 + G THHN/THWN-2 LP-1/12 → D1	48.0	0.50	0.08	119.90	1
W-06	2 × #12 + G THHN/THWN-2 LP-1/12 → PS-1	35.0	0.94	0.11	119.87	1
W-07	2 × #12 + G THHN/THWN-2 LP-1/14 → D1	30.0	0.25	0.02	119.97	1
W-08	2 × #12 + G THHN/THWN-2 LP-1/14 → PS-3	28.0	0.73	0.07	119.92	1
W-09	18/2 CL3R PS-1:OUT1 → DEC-1	4.0	2.20	0.58	23.86	1
W-10	2 × #12 + G THHN/THWN-2 PS-1:AC-THRU → PS-2	4.0	0.43	0.01	119.99	1
W-11	18/2 CL3R PS-2:OUT1 → DEC-2	4.0	1.83	0.49	23.88	1
W-12	18/2 CL3R PS-3:OUT1 → CON-1	20.0	0.21	0.28	23.93	1
W-13	18/2 CL3R PS-3:OUT1 → T3	20.0	1.47	1.94	23.53	1
W-14	18/2 CL3R PS-3:OUT1 → T3	20.0	1.47	1.94	23.53	1

LOADING / CAPACITY

TAG / OUTPUT	LOAD	RATED	LOAD %
PS-1 / OUT1	52.80 W	96 W	55.0
PS-2 / OUT1	44.00 W	96 W	45.8
PS-3 / OUT1	75.40 W	96 W	78.5
DEC-1 / CH1	0.55 A	5 A	11.0
DEC-1 / CH2	0.55 A	5 A	11.0
DEC-1 / CH3	0.55 A	5 A	11.0
DEC-1 / CH4	0.55 A	5 A	11.0
DEC-2 / CH1	1.83 A	5 A	36.7
DEC-2 / CH2	1.83 A	5 A	36.7
DEC-2 / CH3	0.00 A	5 A	0.0
DEC-2 / CH4	0.00 A	5 A	0.0
LP-1/12 / 12	1.44 A	20 A	7.2
LP-1/14 / 14	0.98 A	20 A	4.9

DMX PATCH

TAG	UNIVERSE	START	END	FOOTPRINT
DEC-1	1	1	4	4
DEC-2	1	5	8	4

BILL OF MATERIALS

SKU	DESCRIPTION	QUANTITY	REELS
VERIFY-DMX-TERMINATOR	DMX end-of-segment terminator — verify equipment requirements [EXAMPLE]	1 ea	—
EX-DECODER-4CH	EXAMPLE 4-channel DMX decoder [EXAMPLE]	2 ea	—
EX-DMX-CONTROLLER	EXAMPLE dmx controller [EXAMPLE]	1 ea	—
EX-DOWNLIGHT-LINE	EXAMPLE line-voltage downlight [EXAMPLE]	6 ea	—
EX-PSU-24V-96W	EXAMPLE 24 V 96 W CV power supply [EXAMPLE]	3 ea	—
EX-TAPE-RGBW	EXAMPLE 24 V rgbw tape [EXAMPLE]	12.0 ft	1
EX-TAPE-TW	EXAMPLE 24 V tunable-white tape [EXAMPLE]	10.0 ft	1
EX-TAPE-WHITE	EXAMPLE 24 V white tape [EXAMPLE]	16.0 ft	1
cl3-18-2-r	18/2 CL3R [EXAMPLE]	74.8 ft	—
cl3-18-3-r	18/3 CL3R [EXAMPLE]	22.0 ft	—
cl3-18-5-r	18/5 CL3R [EXAMPLE]	22.0 ft	—
dmx-24-1p-plenum	24 AWG 1-pair 120 Ω plenum [EXAMPLE]	60.5 ft	—
thhn-12	2 × #12 + G THHN/THWN-2 (individual conductor feet) [EXAMPLE]	478.5 ft	—

GENERAL NOTES

NO.	NOTE
1	Install and commission equipment in accordance with the approved product documentation, project specifications and adopted code. Verify listings and installation conditions before procurement.
2	Field-verify circuit voltage, source identity, enclosure locations, access and actual one-way cable lengths before installation. Coordinate discrepancies with the designer.
3	Maintain required separation, barriers and wiring methods between power-limited circuits and branch circuits. Cable voltage rating alone does not authorize mixed routing.
4	Verify conductor material, gauge, insulation, environmental rating, ampacity and terminal capacity for every run. Account for applicable ambient and grouping adjustments.
5	Do not parallel power-supply outputs or field conductors unless the listed equipment instructions and applicable rules permit the arrangement. Provide approved distribution and overcurrent protection as required.
6	Route wired DMX as a daisy chain or through a listed opto-splitter. Terminate the final receiver of each physical segment as required by the receiving equipment instructions. Verify shield and common connections.
7	Observe the tape manufacturer maximum run, feed arrangement, cut interval, polarity and thermal mounting requirements. Coordinate extra feeds and accessible power supplies where required.
8	Apply the project PSU operating-load target of 80% unless a reviewed project setting specifies otherwise. This company target is separate from the listed supply rating and circuit sizing rules.
9	Treat DALI bus insulation and routing in accordance with the actual devices and adopted code; do not assume a DALI pair is SELV or may share a raceway solely because its nominal signal voltage is low.
10	Coordinate controller protocols, addressing, universes, data link lengths and termination during commissioning. Verify operation of all channels at the maximum permitted operating load.
11	Single-ended SPI data runs above the project limit require a compatible differential link or revised controller location. Size pixel power separately from the data connection.
12	Seal, protect and support outdoor and direct-burial cable systems using products listed for the actual location. Verify cable, splice and enclosure ratings as a complete installation.

PROJECT RECORD

FIELD	VALUE
Project	EXAMPLE - Gallery lighting riser
Number	EX-001
Client	Example design review
Site	
Designer / checker	EXAMPLE /
Basis	NEC 2023; PSU operating target 80%; line / DC VD targets 3% / 3%.
Review	0 errors; 31 warnings. Resolve engineering Review before issue. Example products and wire templates require verification.

SYMBOL LEGEND

Panel / circuit PANEL / CIRCUIT	Power supply POWER SUPPLY	DMX decoder DMX DECODER	DMX controller DMX CONTROLLER
LED TAPE · 4 CH LED TAPE / 4 CH	LED TAPE · 2 CH LED TAPE / 2 CH	LED TAPE · 1 CH LED TAPE / 1 CH	Downlight DOWNLIGHT

LINE LEGEND

	Line-voltage conductors
	Class 2 power
	DMX and Ethernet
	Cable crossing / no electrical connection
	Open circle at equipment outline = cable connection; W-tags refer to wire schedule



PROJECT
EXAMPLE - Gallery lighting riser

PROJECT NUMBER
EX-001

CLIENT
Example design review

SITE ADDRESS

SHEET TITLE
SCHEDULES,
LEGEND & NOTES

SHEET

L-2

DATE
2026-09-24

SCALE
NOT TO SCALE

DRAWN BY
EXAMPLE

CHECKED BY

LATEST REVISION
—

ISSUE STATUS
NOT FOR CONSTRUCTION